

## Sirius SI23 Self-Contained Pyrometer

The **Sirius** series non-contact infrared temperature sensors were developed to meet the growing demand for small and easy-to-install sensors with first-class optical and electronic characteristics. These non-contact infrared temperature sensors operate at the near end of the infrared spectrum and are therefore an excellent choice for measurement of ferrous and non-ferrous metals above 50°C, as the emissivity of un-oxidized metal surface is higher at shorter wavelengths. Another major advantage is the lower sensitivity for changes in product emissivity at shorter wavelengths.

The **Sirius** sensor series are extremely reliable as they operate without any mechanically moving parts and their optical lens, detector and electronics are protected inside a rugged stainless steel housing. By utilizing digital signal processing, the **Sirius** line exceeds standard analog pyrometers as far as precision and repeatability are concerned.

**Chart 1:** Temperature Range / Spectral Response

Model SI23	
Spectral Range	2 – 2.6 μm
Temperature Ranges	50° to 400°C (122° to 752°F)
	100° to 600°C (212° to 1112°F)
	150° to 900°C (302° to 1652°F)

Sirius pyrometer's rugged stainless steel housing



**Lenses:** The infrared energy radiated by the target is collimated directly onto the detector via the lens and is digitally processed to provide optimum performance. Choose from the lens selection chart below for exact focus distance and spot size to meet the target size requirement. Lenses are made of an optical glass which is highly transparent in the spectral region of this model. If additional windows are necessary, they must offer similar optical characteristics.

The detector is sensitive to infrared radiation in an area called the **cone of vision**. This area has to be kept free from any intervening objects. For the spot size diameter at different distances, please refer to **Chart 2**. The cone of vision diameter in front of the lens is approximately 18 mm. Optional lenses are available and field interchangeable for the IR sensor's focus distance and spot size, without the need for re-calibration.

**Optical Alignment:** Aiming the pyrometer to the measured target is facilitated by an integrated laser that pinpoints the center of the measured spot. The optical axis is aligned with the mechanical axis of the sensor housing. The laser can be switched on/off directly at the sensor via a push button located on the right angle AK10 cable connector, *PSCwin* Software, an external contact closure, or by digital output commands.

Lens	Lens Aperture	Distance	Spot Size 50° to 400°C	Spot Size 100° to 600°C	Spot Size 150° to 900°C
OS09-A	18 mm	150 mm	2.5 mm	1.7 mm	1.3 mm
OS09-B	18 mm	165 mm	2.8 mm	1.9 mm	1.4 mm
OS09-C	18 mm	180 mm	3.2 mm	2.1 mm	1.6 mm
OS09-D	18 mm	210 mm	3.8 mm	2.5 mm	1.9 mm
OS09-E	18 mm	250 mm	4.7 mm	3.1 mm	2.4 mm
OS09-F	18 mm	320 mm	6.2mm	4.1 mm	3.1 mm
OS09-G	18 mm	400 mm	7.9 mm	5.3 mm	3.9 mm
OS09-H	18 mm	650 mm	12.2 mm	8.1 mm	6.1 mm

**Chart 2:** Spot size diameter at lens aperture and at focus distance.

**Temperature Output Signal:** *Sirius* pyrometers offer analog and digital output signals for indication, recording, archiving and controlling of measured process temperatures. The isolated analog output is switchable from 0 to 4 to 20mA. Zero and full-scale temperatures are adjustable to cover any portion of the instrument's available temperature span to a minimum of 51°C. Choice of two digital communication interfaces, **RS232** or **RS485**.

**Signal Filtering:** For measuring and holding of the highest instantaneous temperature value, a **peak picker** (maximum value storage) is installed to compensate for interruptions or attenuation of the IR signal caused by

bursts of steam, smoke or dust that block the sensor's field of view. It can be either reset automatically, by an external contact closure or periodically, by a user pre-set clear time. The **response time** is the length of time it takes for the output signal to reach 90% of a step change in measured temperature. It can be used to filter out rapid variations in temperature and achieve a more stable signal for control or display purposes.

**Software:** The PSCwin Software is available for automatic or manual set up of the pyrometer, and for recording and saving of graphics or table files. At the same time these files can be used for quality assurance purposes because the parameter settings are recorded as well. Minimum computer requirements: 500 MHz clock frequency and Windows® 7, XP or Vista operating system.

Sirius SI23 Specifications	
Spectral Range:	1.65 - 2.6 µm
Temperature Range:	Can be scaled within the limits of the basic range, minimum adjustable span 50°C (122°F)
Signal Conditioning:	Digital Processing
Measurement Uncertainty:	± 0.3% of measured value in °C, ± 2°C (T <sub>A</sub> = 23°C, ε = 1, t <sub>90</sub> = 1 s)
Repeatability:	0.1% of measured value in °C, ± 1°C (T <sub>A</sub> = 23°C, ε = 1, t <sub>90</sub> = 1 s)
Response Time t <sub>90</sub> :	5 ms, adjustable to 10s
Emissivity Adjustment:	0.20 to 1.00
Power Supply:	24 VDC (15 to 30 VDC); 1 VA max.
Isolation:	Power supply, analog and digital output are galvanically isolated against each other and the housing
Analog Output:	0/4 to 20 mA, selectable, isolated, max. load: 500 Ω
Digital Interface:	RS232C optional RS485 addressable, baud rate 57,6 kBd max., galvanically isolated
Parameter:	Changeable and readable via serial interface: emissivity, exposition time, peak picker reset time, device temperature, address, baud rate, temperature range
Resolution:	0.1°C
Optical Alignment:	Laser Pointer (Laser Class 2, max. output power 1mW, 635nm)
Operation Indicator:	Green LED
Housing Rated:	IP 65 (refer to DIN 40 050) power cable connected
Ambient Temperature:	0° to +70°C at housing
Storage Temperature:	-20° to +70°C
Weight:	300 grams (10.58 ounces)
CE - Directive:	Conform to EMV regulation 89/336/EWG

**Accessories:** Interconnecting cable must be ordered separately.

*Sirius* Mounting Bracket HA11-00


Model	Description
AK43-05	Interconnecting Cable 5 meter, with Straight Connector and 1 meter Communication Cable with 9 pin SUB-D-Connector
AK10-05	Comparable to AK43 but with 90° Connector and Laser Button
BL11-00	Air Purge
A10-01	Mounting Bracket for Cooling Housing KG60
HA11-00	Stainless Steel Adjustable Mounting Bracket
A22-00	Adjustable Swivel Base for Cooling Housing
KG60-00	Cooling Housing for high ambient temperature up to 140°C



**Standard Equipment:** IR Sensor with lens, 2 mounting nuts M40 x 1.5 and Operation Manual.

*Sirius* Cooling Housing KG60-00

**Dimensions:** *Sirius* SI23 Stand-Alone IR Sensor

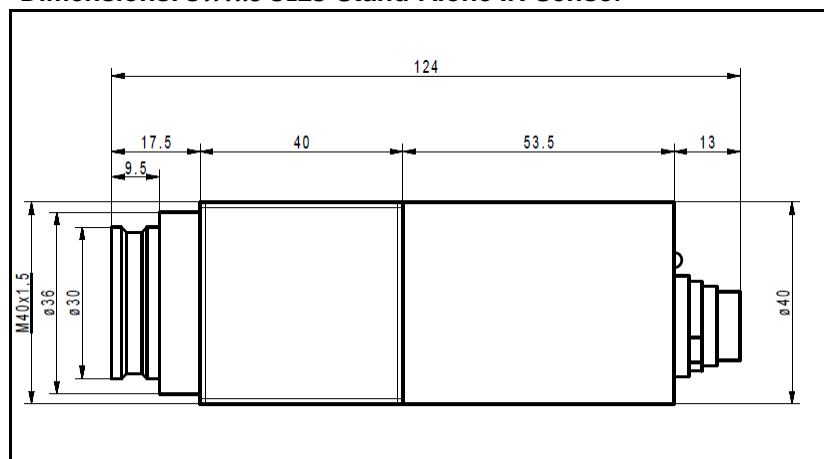

Specifications are subject to be changed without notice.  
Sirius\_SI23\_120613